


# HFD2

# SUBMINIATURE DIP RELAY



File No.:E133481



### Features

- High sensitive: 150mW
- Matching standard 16 pin IC socket
- High switching capacity 60W/125VA
- Bifurcated contacts
- Epoxy sealed for automatic wave soldering and cleaning
- Single side stable and latching type available
- Environmental friendly product available (RoHS compliant)
- Outline Dimensions: 20.2 x 10.0 x 10.6 mm

### CONTACT DATA

Contact arrangement	2C
Initial contact resistance	50mΩ
Contact material	see ordering info.
Contact rating (Res. load)	2A 30VDC 1A 125VAC
Max. switching power	60W / 125VA
Max. switching voltage	220VDC / 250VAC
Max. switching current	2A
Min. applicable load	10mV 10μA
Electrical life	1 x 10 <sup>5</sup> OPS (at 2A 30VDC) 5 x 10 <sup>5</sup> OPS (at 1A 30VDC)
Mechanical life	1 x 10 <sup>6</sup> OPS

### CHARACTERISTICS

Initial insulation resistance		1000MΩ (at 500VDC)
Dielectric strength	Contacts to coil	1coil: 1500VAC 1min. 2coil: 1000VAC 1min.
	Contacts to contact	1000VAC 1min.
Operate time (at nomi. volt.)		Max. 4ms
Release time (at nomi. volt.)		Max. 3ms
Set time (latching)		3ms
Reset time (latching)		3ms
Bounce time		1.5ms
Ambient temperature		-40 °C to +85 °C
Humidity		5 to 85% RH
Vibration resistance		10 to 55Hz 196m/s <sup>2</sup> (20g)
Shock resistance	Functional	490m/s <sup>2</sup> (50g)
	Destructive	980m/s <sup>2</sup> (100g)
Capacitance	Contact to contact	2.0pF
	Contact set to contact	1.5pF
	Contact to coil	5.0pF
Termination		PCB (DIP)
Unit weight		4.5g
Construction		Sealed IP67

### COIL

Coil power		Sensitive	Standard
	Single side stable	150mW	200mW
	1 coil latching	75mW	100mW
	2 coils latching	150mW	200mW
Temperature rise	Max. 65°C		

### COIL DATA

Single side stable Standard (200mW) at 20°C

Order Number	Nominal Voltage (VDC)	Pick-up Voltage (VDC)	Drop-out Voltage (VDC)	Coil Resistance (Ω±10%)	Max. Allowable Voltage (VDC)
003-M	3	2.30	0.3	45	6
005-M	5	3.75	0.5	125	10
006-M	6	4.50	0.6	180	12
009-M	9	6.75	0.9	405	18
012-M	12	9.00	1.2	720	24
015-M	15	11.25	1.5	1125	30
024-M	24	18.0	2.4	2880	48
048-M	48	36.0	4.8	11520	96

Single side stable Sensitive (150mW) at 20°C

Order Number	Nominal Voltage (VDC)	Pick-up Voltage (VDC)	Drop-out Voltage (VDC)	Coil Resistance (Ω±10%)	Max. Allowable Voltage (VDC)
003-S	3	2.4	0.3	60	7.0
005-S	5	4.0	0.5	167	11.5
006-S	6	4.8	0.6	240	13.8
009-S	9	7.2	0.9	540	20.8
012-S	12	9.6	1.2	960	27.7
015-S	15	12.0	1.5	1500	34.6
024-S	24	19.2	2.4	3840	55.4



HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2005 Rev. 1.02

## COIL DATA

### 1 coil latching Standard (100mW) at 20 °C

Order Number	Nominal Voltage (VDC)	Set / Reset Voltage (VDC)	Coil Resistance ( $\Omega \pm 10\%$ )	Max. Allowable Voltage (VDC)
003-M-L1	3	2.25	90	8.4
005-M-L1	5	3.75	250	14
006-M-L1	6	4.5	360	17
009-M-L1	9	6.75	810	25
012-M-L1	12	9.0	1440	34
015-M-L1	15	11.25	2220	42
024-M-L1	24	18.0	4000	56

### 1 coil latching Sensitive (150mW) at 20 °C

Order Number	Nominal Voltage (VDC)	Set / Reset Voltage (VDC)	Coil Resistance ( $\Omega \pm 10\%$ )	Max. Allowable Voltage (VDC)
005-S-L1	5	4.0	330	16
006-S-L1	6	4.8	480	19
009-S-L1	9	7.2	1080	29
012-S-L1	12	9.6	1920	39
015-S-L1	15	12.0	3000	43
024-S-L1	24	19.2	7680	78

### 2 coils latching Standard (200mW) at 20 °C

Order Number	Nominal Voltage (VDC)	Set / Reset Voltage (VDC)	Coil Resistance ( $\Omega \pm 10\%$ )	Max. Allowable Voltage (VDC)
003-M-L2	3	2.25	45	6
005-M-L2	5	3.75	125	10
006-M-L2	6	4.5	180	12
009-M-L2	9	6.75	405	18
012-M-L2	12	9.0	720	24
015-M-L2	15	11.25	1125	30
024-M-L2	24	18.0	2040	48

### 2 coils latching Sensitive (150mW) at 20 °C

Order Number	Nominal Voltage (VDC)	Set / Reset Voltage (VDC)	Coil Resistance ( $\Omega \pm 10\%$ )	Max. Allowable Voltage (VDC)
005-S-L2	5	4.0	167	11.5
006-S-L2	6	4.8	240	13.8
009-S-L2	9	7.2	540	20.8
012-S-L2	12	9.6	960	27.7
015-S-L2	15	12.0	1500	34.6
024-S-L2	24	19.2	3840	55.4

**Notes:** When user's requirements can't be found in the above table, special order allowed.

## SAFETY APPROVAL RATINGS

<b>UL&amp;CUR</b>	0.5A 60VDC 2A 25VDC 1A 100VAC (industrial control, business equipment)
	1A 120VAC (Telephone equipment) 2A 125VAC

## TYPICAL CONTACT LIFE EXPECTANCY


Voltage	Power	Number of operations	
		Resistive Load	Inductive Load (For AC $\cos \phi = 0.7$ )
50mVDC	50uW	$5 \times 10^7$	$5 \times 10^7$
30VDC	20W	$3 \times 10^6$	$1 \times 10^6$
30VDC	30W	$1 \times 10^6$	$3 \times 10^5$
30VDC	60W	$1 \times 10^5$	$1.5 \times 10^4$
60VDC	20W	$3 \times 10^6$	--
60VDC	30W	$5 \times 10^5$	--
60VDC	60W	$1 \times 10^5$	--
30VAC	40VA	$3 \times 10^6$	$1 \times 10^6$
30VAC	80VA	$1 \times 10^6$	$3 \times 10^5$
30VAC	120VA	$1 \times 10^5$	$1.5 \times 10^4$
60VAC	40VA	$3 \times 10^6$	$1 \times 10^6$
60VAC	80VA	$1 \times 10^6$	$3 \times 10^5$
60VAC	120VA	$1 \times 10^5$	$1.5 \times 10^4$
125VAC	40VA	$3 \times 10^6$	$1 \times 10^6$
125VAC	80VA	$1 \times 10^6$	$3 \times 10^5$
125VAC	125VA	$1 \times 10^5$	$1.5 \times 10^4$

## ORDERING INFORMATION

<b>Type</b>		HFD2 / 012		S	L2	D	XXX
<b>Coil voltage</b>		3, 5, 6, 9, 12, 15, 24, 48VDC(Standard Single only)					
<b>Coil power</b>		M: Standard    S: Sensitive					
<b>Sort</b>		L1: 1 coil latching    L2: 2 coils latching		Nil: Single side stable			
<b>Contact material</b>		D: Ag-AuAg8 / Ag-AuAg8		Nil: AgPd60 / Ag-AuAg8			
<b>Customer special code</b>		(Only for special requirements, e.g. 555 stands for RoHS compliant)					


## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

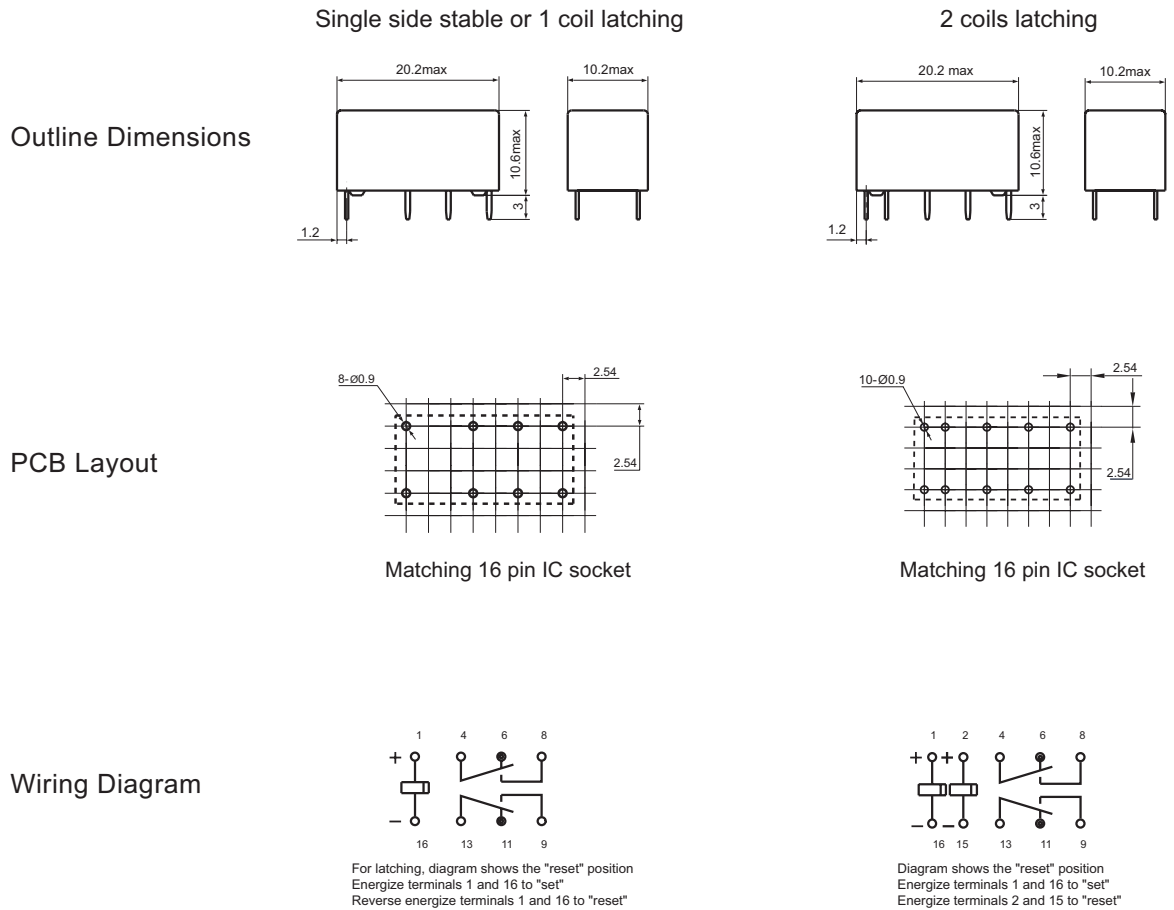


## CHARACTERISTIC CURVES

MAXIMUM SWITCHING POWER

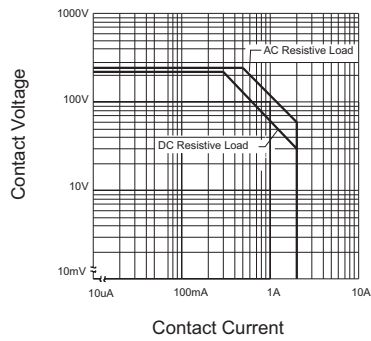

COIL TEMPERATURE RISE

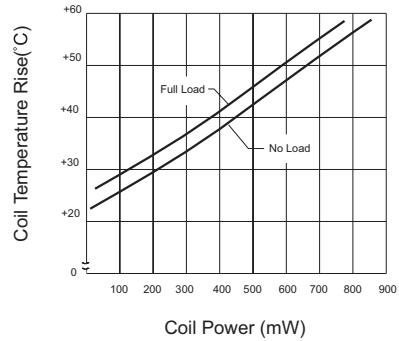

### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice.

We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.

# HandsOn Technology

<http://www.handsontec.com>

creativity for tomorrow's better living...

*HandsOn Tech provides a multimedia and interactive platform for everyone interested in electronics. From beginner to diehard, from student to lecturer... Information, education, inspiration and entertainment. Analog and digital; practical and theoretical; software and hardware...*



HandsOn Technology support Open Source Hardware(OSHW) Development Platform.

**Learn : Design : Share**

[www.handsontec.com](http://www.handsontec.com)



[www.handsontec.com](http://www.handsontec.com)



[www.handsontec.com](http://www.handsontec.com)




[www.handsontec.com](http://www.handsontec.com)

[www.handsontec.com](http://www.handsontec.com)


## Welcome to Handsontec Store



LCD+Keyboard Shield

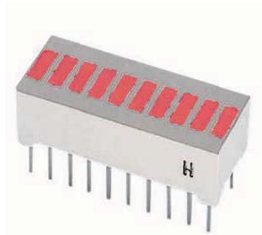


10-Segments LED Bar Display




Ethernet Module



Arduino Uno



MicroSD Breakout Board




WiFi Module



20x4 LCD Display Module



Stepper Motor Driver



PWM Motor Speed Controller



[www.handsontec.com](http://www.handsontec.com)

Breakout Board & Modules



[www.handsontec.com](http://www.handsontec.com)

Integrated Circuits



[www.handsontec.com](http://www.handsontec.com)

Discrete Parts



[www.handsontec.com](http://www.handsontec.com)

Assembled Kits



[www.handsontec.com](http://www.handsontec.com)

Connectors