



LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER


ELM304X Series
ELM306X Series
ELM308X Series

Features:

- ELM304X V_{DRM} of 400V, ELM306X V_{DRM} of 600V and ELM308X V_{DRM} of 800V
- High isolation voltage between input and output ($V_{iso}=3750$ V rms)
- Zero voltage crossing
- Pb free and RoHS compliant.
- UL approved (No. E214129)
- VDE approved (No.40028116)
- SEMKO approved
- NEMKO approved
- DEMKO approved
- FIMKO approved



Schematic



Description

The ELM304X, ELM306X and ELM308X devices consist of a GaAs infrared emitting diode optically coupled to a monolithic silicon detector performing the function of a zero voltage crossing bilateral triac driver.

They are designed for use with a discrete power triac in the interface of logic systems to equipment powered from 110 to 240 VAC lines, such as solid-state relays, industrial controls, motors, solenoids and consumer appliances, etc.

Applications

- Solenoid/valve controls
- Light controls
- Static power switch
- AC motor drivers
- E.M. contactors
- Temperature controls
- AC Motor starters
- Solid state relays

Pin Configuration

1. Anode
2. Cathode
3. Terminal
4. Terminal



LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

Absolute Maximum Ratings (T_a=25°C)

| Parameter | | Symbol | Rating | Unit |
|--------------------------|--|---------------------|----------|---------|
| Input | Forward current | I _F | 60 | mA |
| | Peak forward current (1us pulse, 300pps) | I _{F(PK)} | 1 | A |
| | Reverse voltage | V _R | 6 | V |
| | Power dissipation | P _D | 100 | mW |
| Output | Off-state Output Terminal Voltage | M304X | 400 | V |
| | | M306X | 600 | |
| | | M308X | 800 | |
| | On state RMS Current | I _{T(RMS)} | 70 | mA(RMS) |
| Power dissipation | | P _D | 300 | mW |
| Isolation voltage *1 | | V _{iso} | 3750 | V rms |
| Operating temperature | | T _{opr} | -40~+110 | °C |
| Storage temperature | | T _{stg} | -55~+150 | °C |
| Soldering temperature *2 | | T _{sol} | 260 | °C |

Notes

*1 AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 & 3 are shorted together, and pins 4, 5 & 6 are shorted together.

*2 For 10 seconds.



LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

Electrical Characteristics (T_a=25°C unless specified otherwise)

Input

| Parameter | Symbol | Min. | Typ.* | Max. | Unit | Condition |
|-------------------------|----------------|------|-------|------|------|-----------------------|
| Forward voltage | V _F | - | - | 1.5 | V | I _F = 30mA |
| Reverse Leakage current | I _R | - | - | 10 | μA | V _R = 6V |

Output

| Parameter | Symbol | Min. | Typ.* | Max. | Unit | Condition |
|---|-------------------|------|-------|------|------|--|
| Peak Blocking Current | I _{DRM1} | - | - | 100 | nA | V _{DRM} = Rated V _{DRM} I _F = 0mA |
| Peak On-state Voltage | V _{TM} | - | - | 3 | V | I _{TM} =100mA peak |
| Critical Rate of Rise off-state Voltage | dv/dt | 1000 | - | - | V/μs | |
| Inhibit Voltage (MT1-MT2 voltage above which device will not trigger) | V _{INH} | - | - | 20 | V | I _F = Rated I _{FT} |
| Leakage in Inhibited State | I _{DRM2} | - | - | 1000 | μA | I _F = Rated I _{FT} , V _{DRM} =Rated V _{DRM} , off state |

Transfer Characteristics

| Parameter | Symbol | Min. | Typ.* | Max. | Unit | Condition | |
|---------------------|--------|-----------------|-------|------|------|-----------|--------------------------|
| LED Trigger Current | 3042 | I _{FT} | - | - | 10 | mA | Main terminal Voltage=3V |
| | 3062 | | | | | | |
| | 3082 | | | | | | |
| | 3043 | | | | | | |
| | 3063 | | | | | | |
| | 3083 | | | | | | |
| Holding Current | 3044 | I _H | - | 280 | - | μA | |
| | 3064 | | | | | | |
| | 3084 | | | | | | |
| | 3084 | | | | | | |

* Typical values at T_a = 25°C









LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series ELM306X Series ELM308X Series

Typical Performance Curves

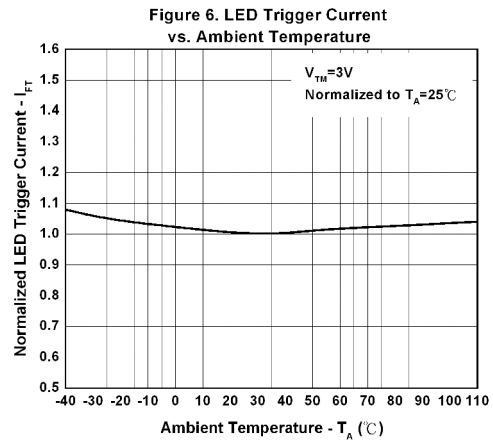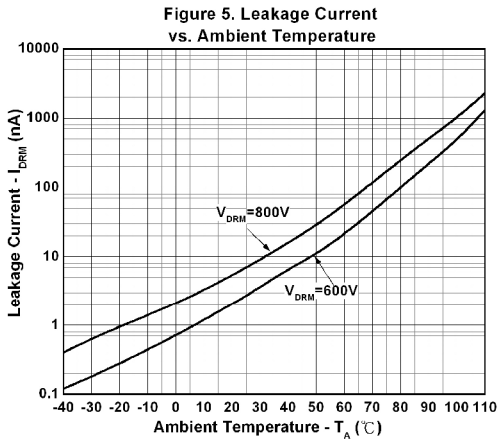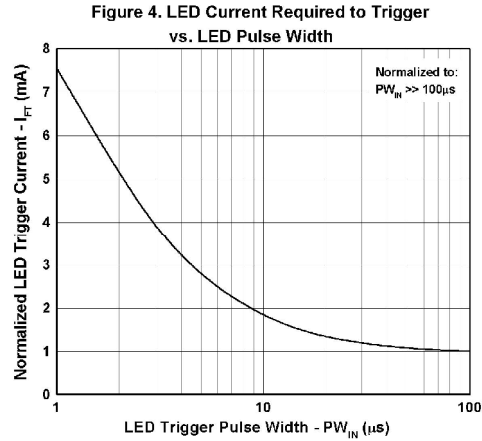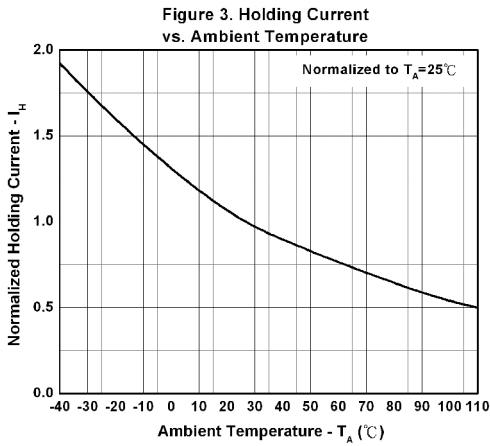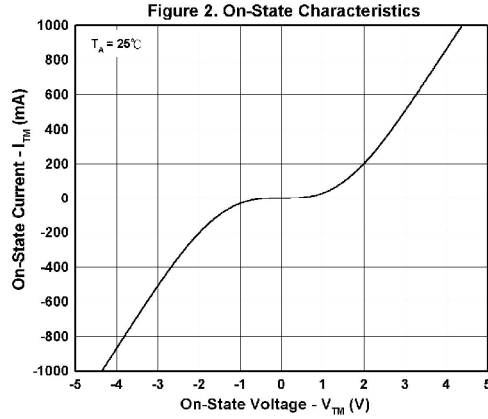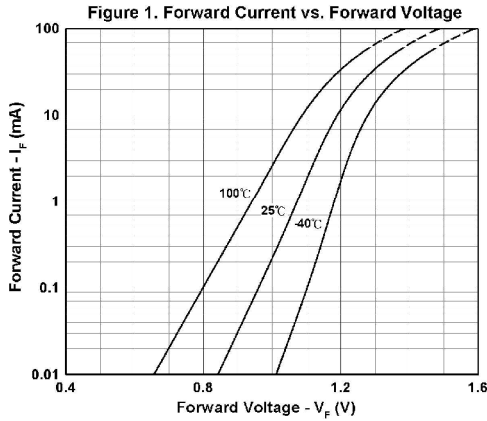



LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

Figure 7. Off-State Output Terminal Voltage vs. Ambient Temperature

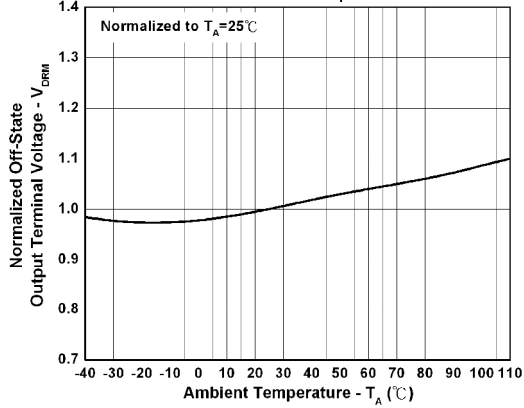


Figure 8. Leakage in Inhibit State vs. Ambient Temperature



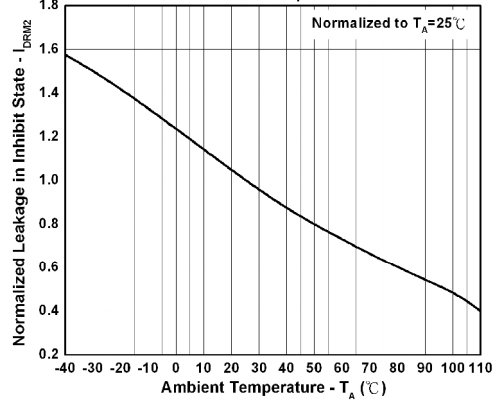



Figure 9. Inhibit Voltage vs. Ambient Temperature

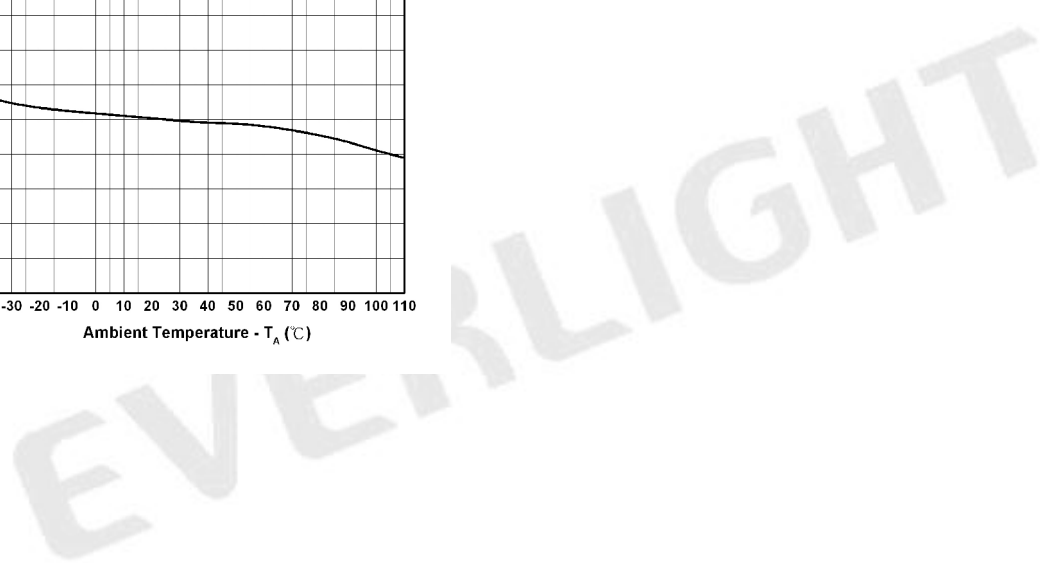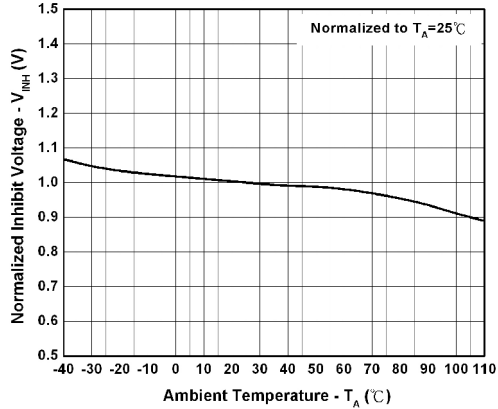

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

Figure 10. Static dv/dt Test Circuit & Waveform

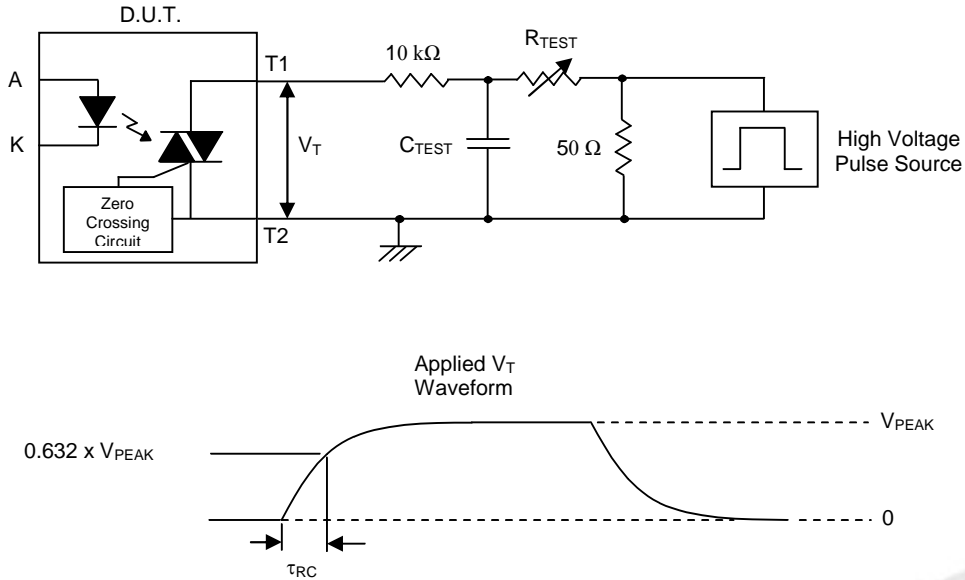

Measurement Method

The high voltage pulse is set to the required V_{PEAK} value and applied to the D.U.T. output side through the RC circuit above. LED current is not applied. The waveform V_T is monitored using a x100 scope probe. By varying R_{TEST} , the dv/dt (slope) is increased, until the D.U.T. is observed to trigger (waveform collapses). The dv/dt is then decreased until the D.U.T. stops triggering. At this point, τ_{RC} is recorded and the dv/dt calculated.

$$dv/dt = \frac{0.632 \times V_{PEAK}}{\tau_{RC}}$$

For example, $V_{PEAK} = 600V$ for EL306X series. The dv/dt value is calculated as follows:

$$dv/dt = \frac{0.63 \times 600}{\tau_{RC}} = \frac{378}{\tau_{RC}}$$



LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

Order Information


Part Number

ELM304X(Z)-V
or **ELM306X(Z)-V**
or **ELM308X(Z)-V**

Note

X = Part No. (2 for $I_{FT}=10mA$, 3 for $I_{FT}=5mA$, 4 for $I_{FT}=3mA$)
Z = Tape and reel option (TA, TB or none).
V = VDE safety approved optional

| Option | Description | Packing quantity |
|--------|---|---------------------|
| None | Standard | 100 units per tube |
| None | Standard + VDE safety optional | 100 units per tube |
| (TA) | TA tape & reel option | 3000 units per reel |
| (TB) | TB tape & reel option | 3000 units per reel |
| (TA)-V | TA tape & reel option + VDE safety optional | 3000 units per reel |
| (TB)-V | TB tape & reel option + VDE safety optional | 3000 units per reel |

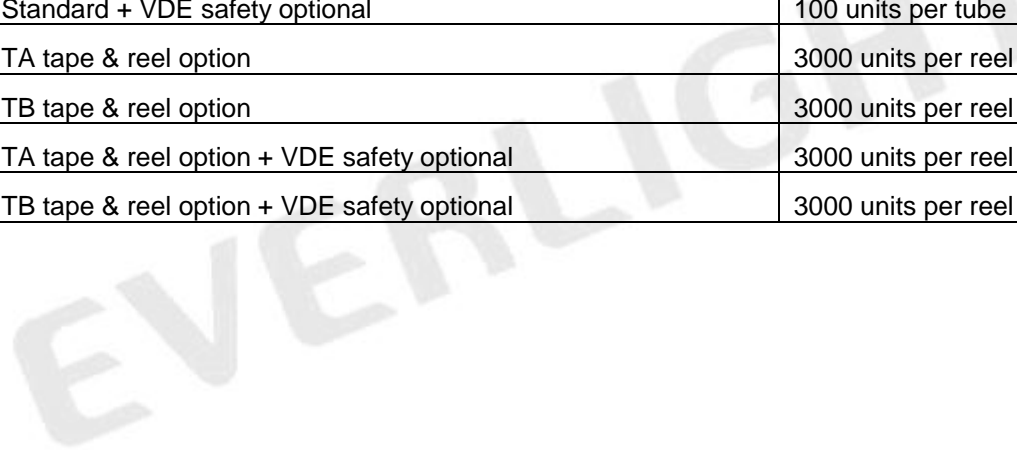





LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER


ELM304X Series
ELM306X Series
ELM308X Series

Package Drawings

(Dimensions in mm)

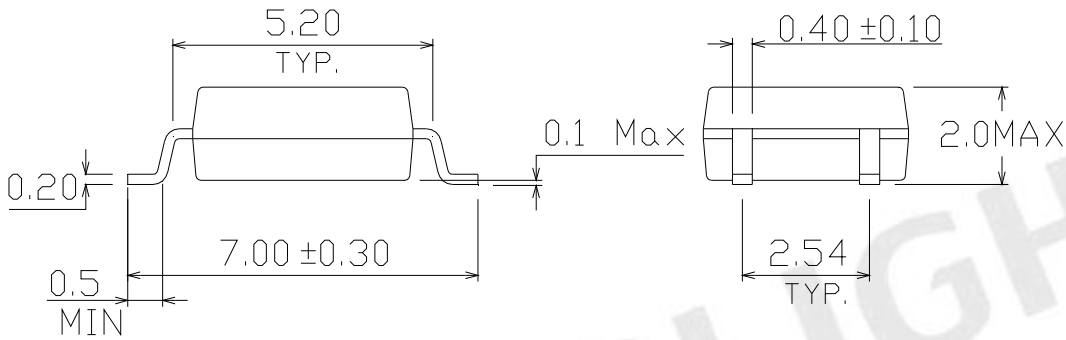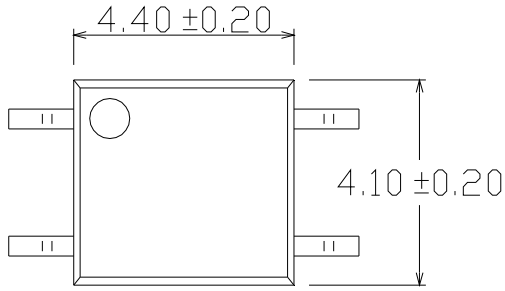

Recommended pad layout for surface mount leadform

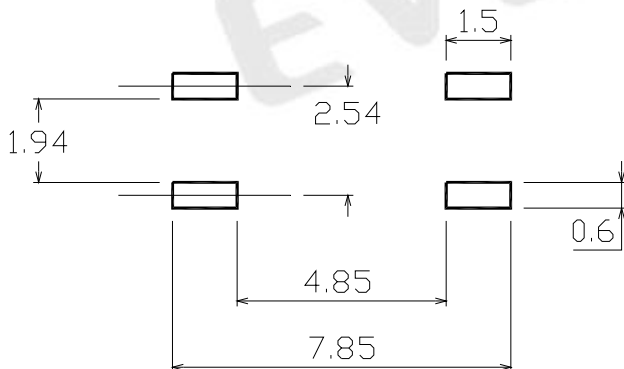



LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

Device Marking



Notes

EL denotes Everlight
M3063 denotes Device Number
Y denotes 1 digit Year code
WW denotes 2 digit Week code
V denotes VDE safety (optional)

EVERLIGHT




LIGHTING FOREVER


4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

Tape & Reel Packing Specifications

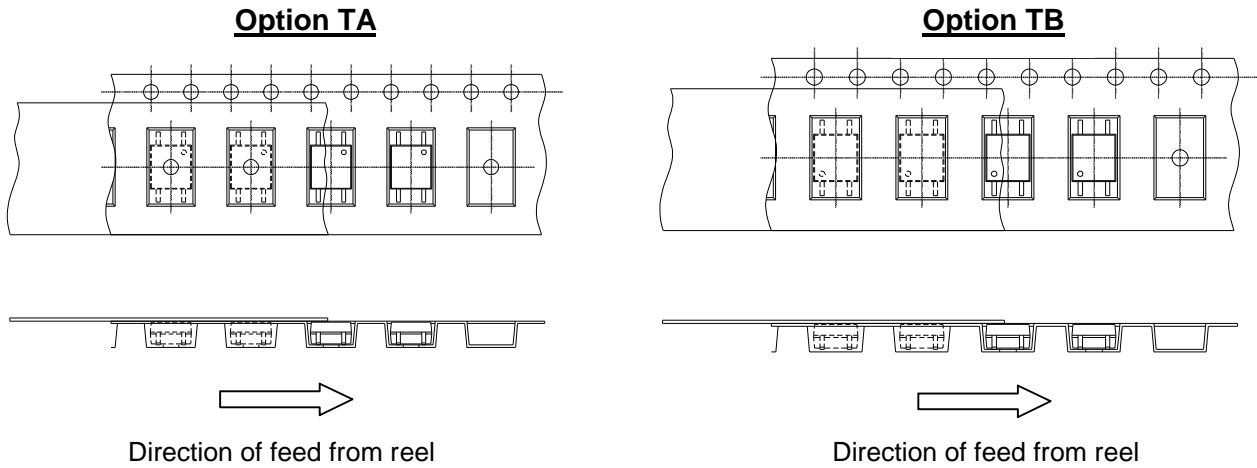

Tape dimensions

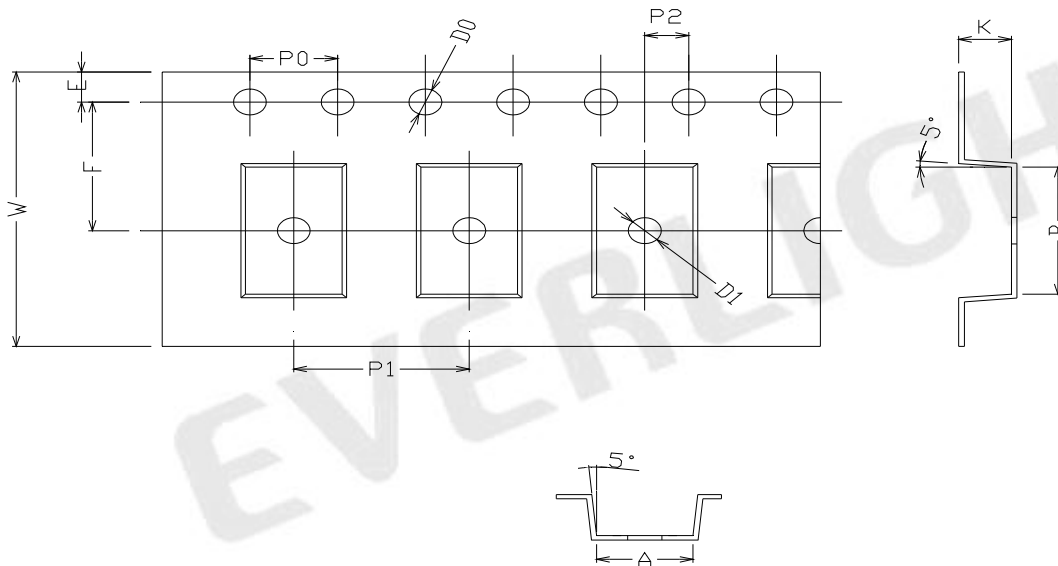

| Dimension No. | A | B | Do | D1 | E | F |
|----------------|------------|-----------|--------------|-------------|------------|-----------|
| Dimension (mm) | 4.4 ± 0.1 | 7.4 ± 0.1 | 1.5 + 0.1/-0 | 1.5 ± 0.1 | 1.75 ± 0.1 | 7.5 ± 0.1 |
| Dimension No. | Po | P1 | P2 | t | W | K |
| Dimension (mm) | 4.0 ± 0.15 | 8.0 ± 0.1 | 2.0 ± 0.1 | 0.25 ± 0.03 | 16.0 ± 0.2 | 2.4 ± 0.1 |




LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

Solder Reflow Temperature Profile

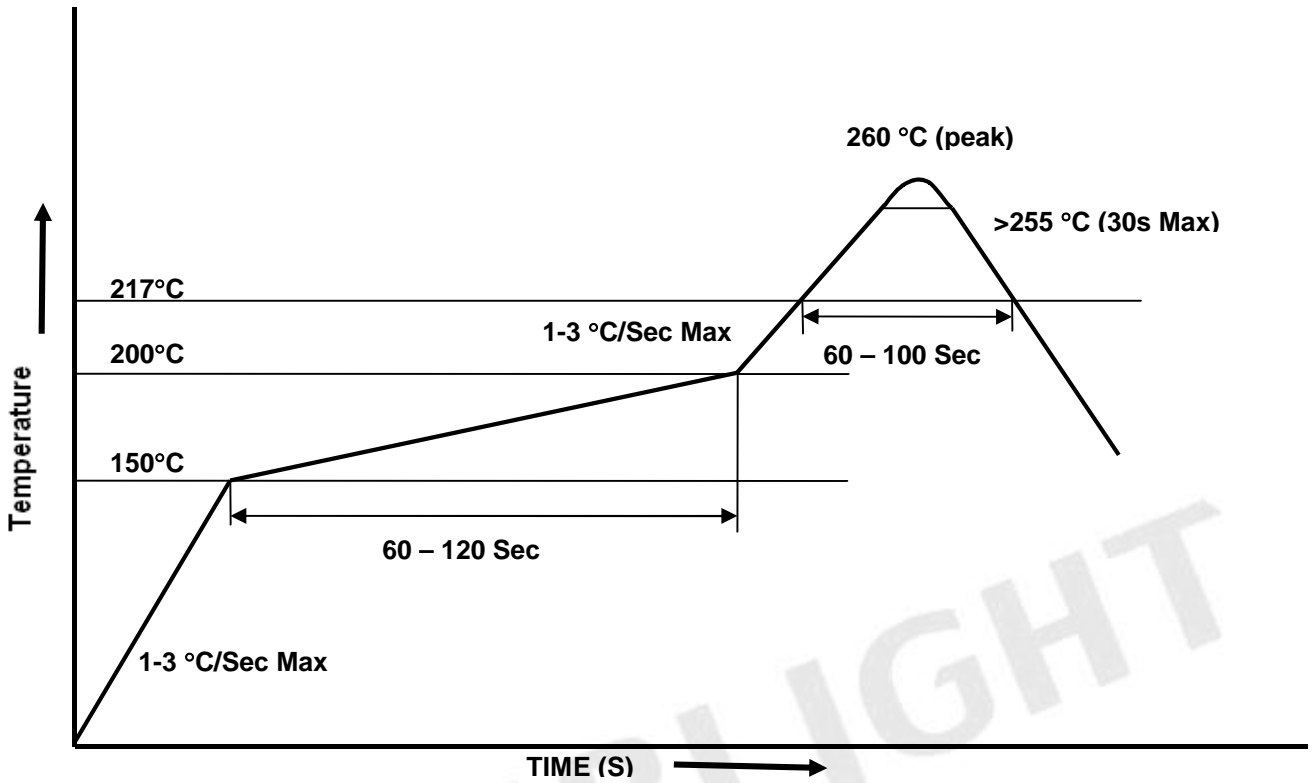



LIGHTING FOREVER

4 PIN SOP ZERO CROSS TRIAC PHOTOCOUPLER

ELM304X Series
ELM306X Series
ELM308X Series

DISCLAIMER

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for use outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

EVERLIGHT